



REV.	CHANGE CONTENT	BY	DATE

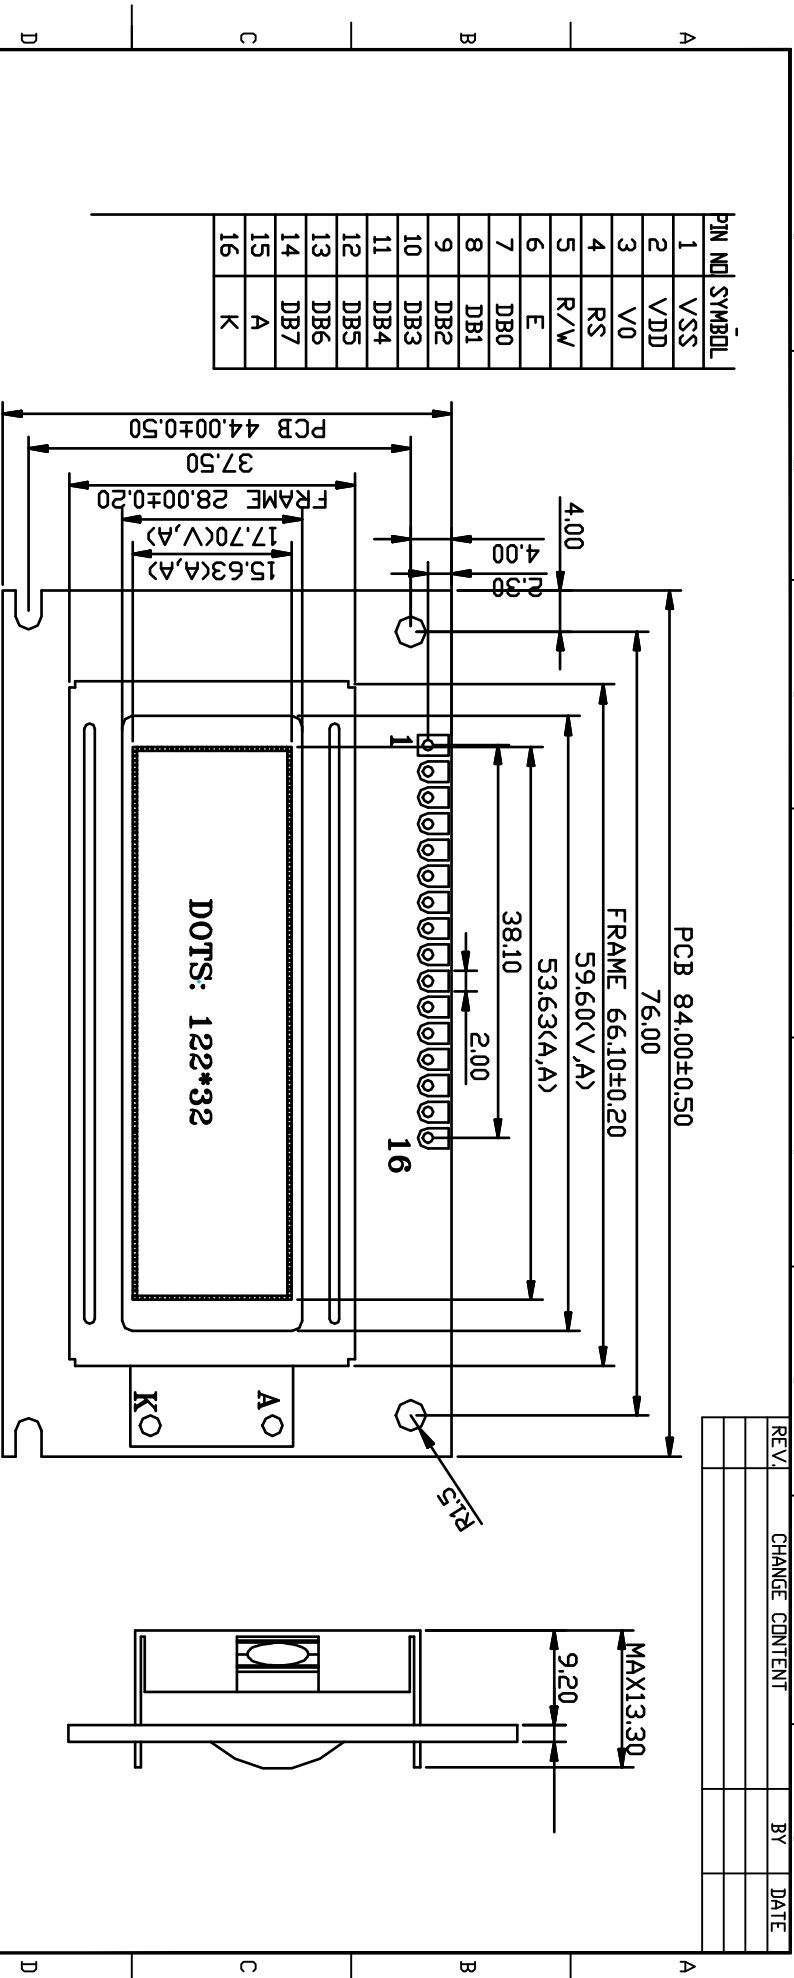

PIN NO	SYMBOL
1	VSS
2	VDD
3	V0
4	RS
5	R/W
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	A
16	K



NOTES:

1. DRIVE METHOD: 1/32DUTY, 1/5BIAS,VOP4.7V, VDD5.0V.
2. VIEWING ANGLE: 6 O'CLOCK.
3. DISPLAY TYPE: STN Negative Blue Transmissive
4. OPERATING TEMP: -20 TO 70°C.
5. STORAGE TEMP: -30 TO 80°C.
6. CONNECTION:COB.
7. BACK LIGHT: White
8. IC:ST7920,ST7921.
9. NOT DIMENSION TOLERANCES IS ±0.2.
1. 井口 带分割线

深圳市创盛安科技有限公司				DRAWING No. : AG12232C03b162-V4	
SHENZHEN CSA TECHNOLOGY CO., LIMITED				DRAWING TITLE: LCM DRAWING	
FILE NO. :				REV. : A	
DESIGN	QIN	DATE	2011.04.21	PROJECTION:	SCALE : -
APPROVED	L.TU	TEL	86+0755-23462044	UNIT : mm	
CHECKED	WU	FAX	86+0755-23462052	SHEET : 1/1	

