


# SMD Power Inductor CDRH4D18C/LD




Halogen  
Free



## Dimension - [mm]

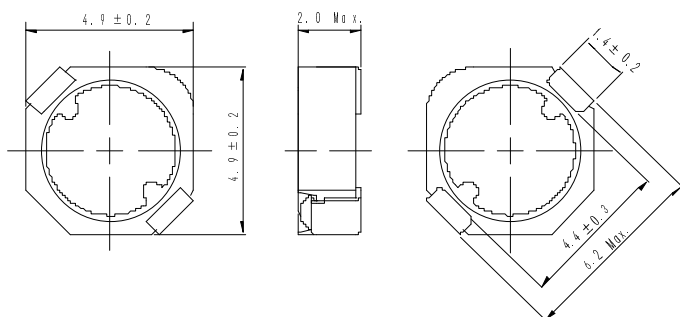

## Land pattern and Schematics - [mm]

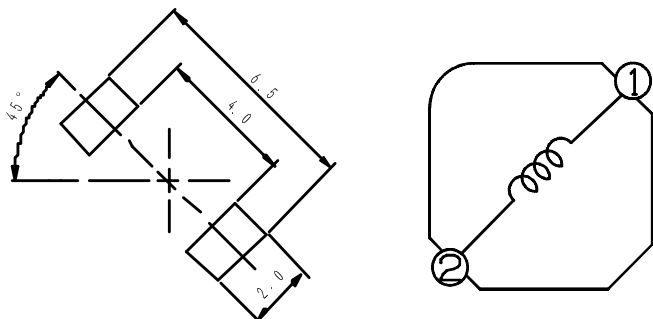

## Description

- Ferrite drum core construction.
- Magnetically shielded.
- L × W × H: 5.1 × 5.1 × 2.0 mm Max.
- Product weight: 135mg(Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.
- Halogen Free available.

## Environmental Data

- Operating temperature range: -40°C~+105°C (including coil's self temperature rise)
- Storage temperature range: -40°C~+105°C
- Solder reflow temperature: 260 °C peak.

## Packaging


- Carrier tape and reel packaging
- 7.0" diameter reel
- 1000pcs per reel

## Applications

- Ideally used in Mobile phone, PDA, MP3, HDD, DSC/DVC, Note book PC, etc as DC-DC converter inductors.

# SMD Power Inductor

## CDRH4D18C/LD



### Electrical Characteristics

| Part No.            | Stamp | Inductance<br>( $\mu$ H)<br>[ within ] ※1 | D.C.R. (m $\Omega$ )<br>Max. (Typ.)<br>(at 20°C) | Saturation<br>Current<br>(A) ※2 | Temperature<br>Rise Current<br>(A) ※3 |
|---------------------|-------|-------------------------------------------|--------------------------------------------------|---------------------------------|---------------------------------------|
| CDRH4D18CLDNP-1R1PC | A     | 1.1 $\pm$ 25%                             | 24(19)                                           | 2.10                            | 3.50                                  |
| CDRH4D18CLDNP-2R2PC | B     | 2.2 $\pm$ 25%                             | 31(25)                                           | 1.30                            | 2.80                                  |
| CDRH4D18CLDNP-3R3PC | C     | 3.3 $\pm$ 25%                             | 49(39)                                           | 1.10                            | 2.20                                  |
| CDRH4D18CLDNP-4R7PC | D     | 4.7 $\pm$ 25%                             | 61(49)                                           | 0.90                            | 2.00                                  |
| CDRH4D18CLDNP-6R3PC | E     | 6.3 $\pm$ 25%                             | 74(59)                                           | 0.75                            | 1.60                                  |
| CDRH4D18CLDNP-100PC | F     | 10 $\pm$ 25%                              | 110(88)                                          | 0.60                            | 1.20                                  |
| CDRH4D18CLDNP-150PC | G     | 15 $\pm$ 25%                              | 151(121)                                         | 0.50                            | 1.05                                  |
| CDRH4D18CLDNP-220PC | H     | 22 $\pm$ 25%                              | 202(162)                                         | 0.42                            | 0.90                                  |
| CDRH4D18CLDNP-330PC | I     | 33 $\pm$ 25%                              | 327(262)                                         | 0.35                            | 0.69                                  |
| CDRH4D18CLDNP-470PC | J     | 47 $\pm$ 25%                              | 456(365)                                         | 0.31                            | 0.57                                  |
| CDRH4D18CLDNP-680PC | K     | 68 $\pm$ 25%                              | 632(506)                                         | 0.26                            | 0.46                                  |
| CDRH4D18CLDNP-101PC | L     | 100 $\pm$ 25%                             | 962(770)                                         | 0.20                            | 0.35                                  |

※1. Inductance measuring condition: at 100kHz.

※2. Saturation current: The value of D.C. current when the inductance decreases to 65% of it's nominal value.


※3. Temperature rise current: The value of D.C. current when the temperature rise is  $\Delta t=40^{\circ}\text{C}$  ( $T_a=20^{\circ}\text{C}$ ).

# SMD Power Inductor CDRH4D18C/LD



## Saturation Current & Temperature Rise Graph



— L (20°C) — L (100°C) —  $\Delta T$

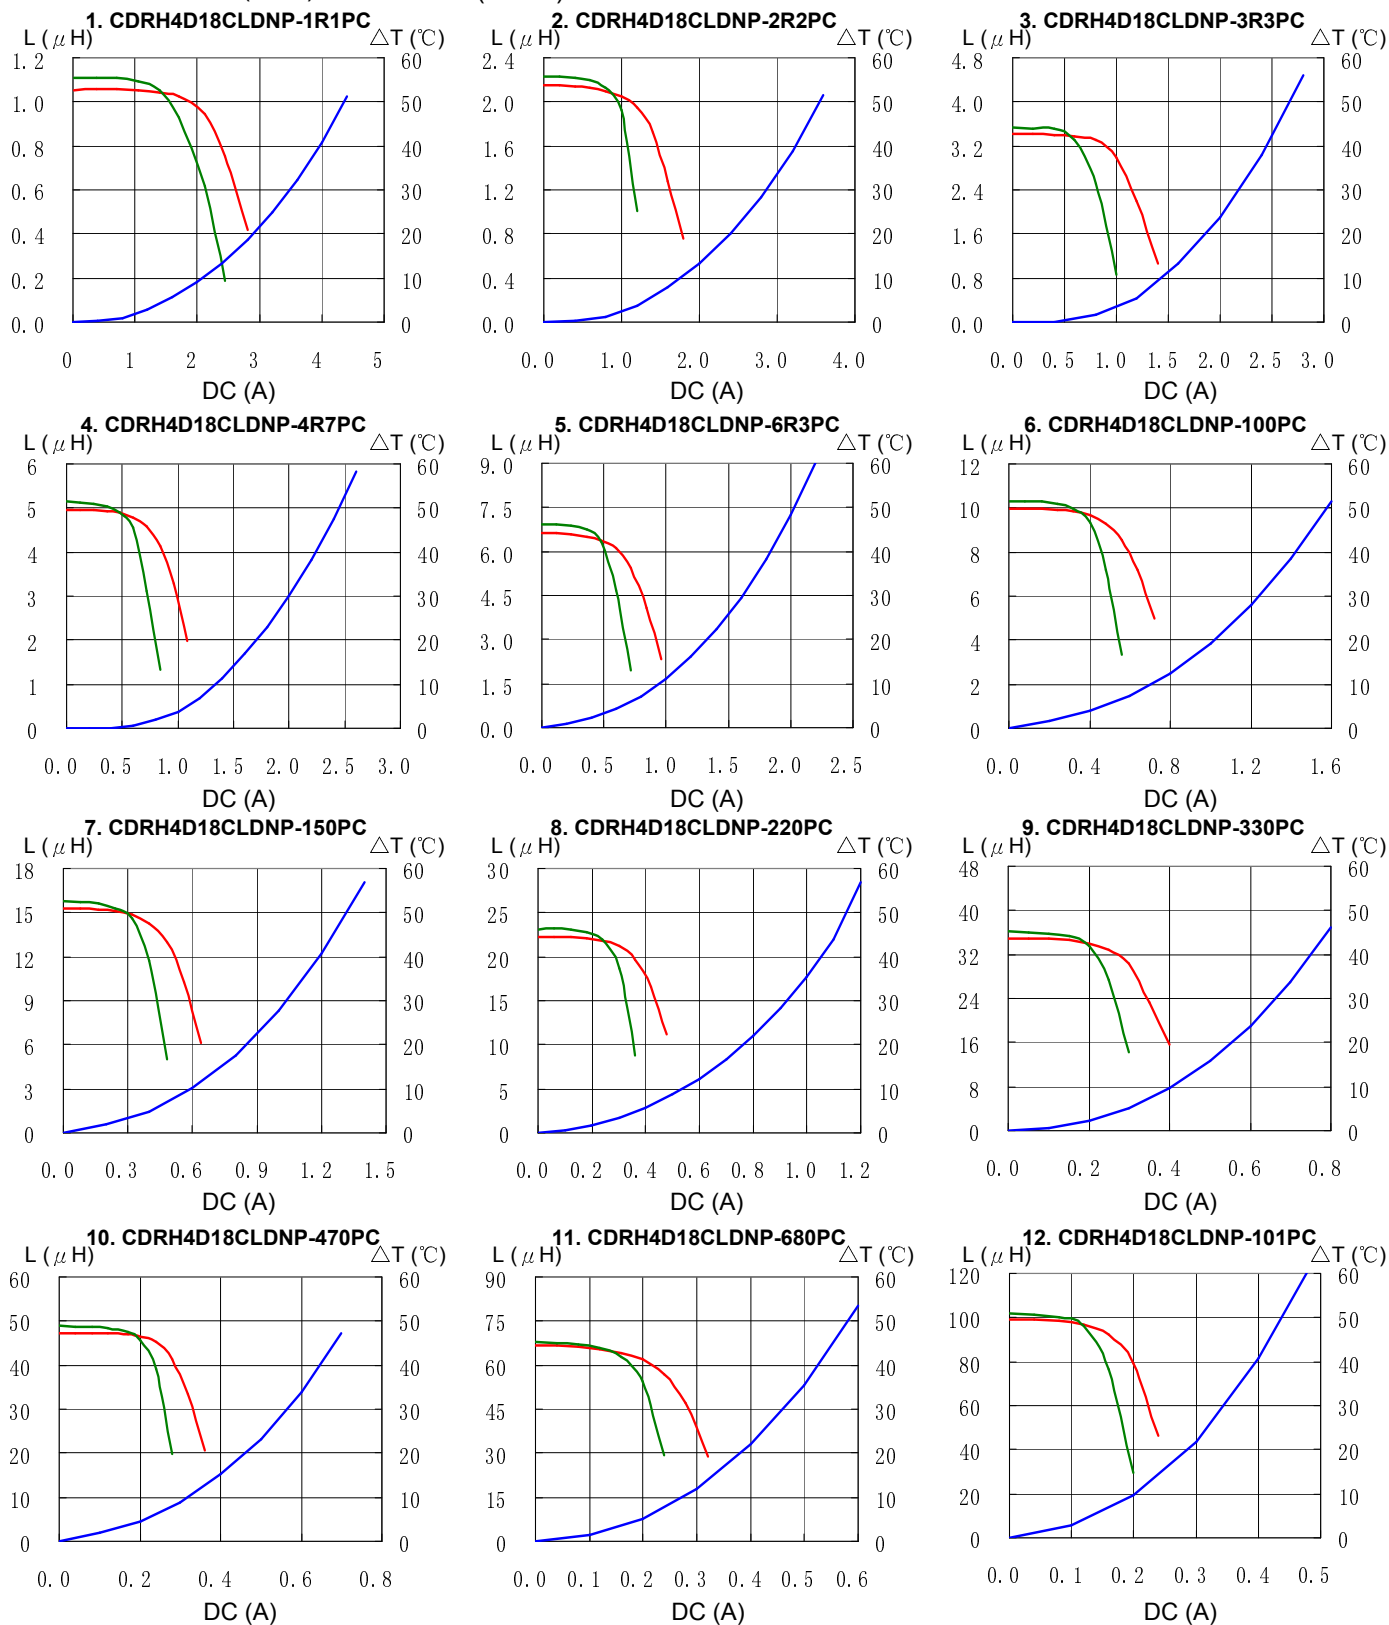

# SMD Power Inductor CDRH4D18C/LD



## Solder Reflow Condition

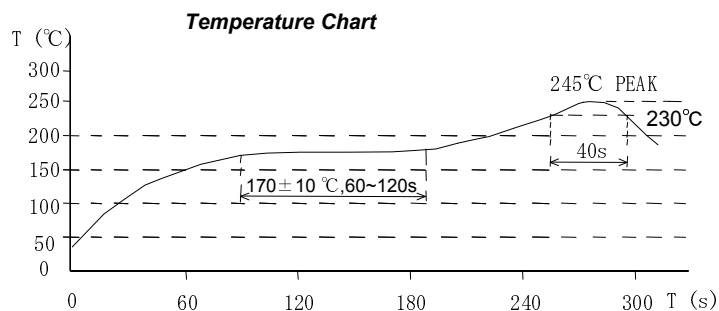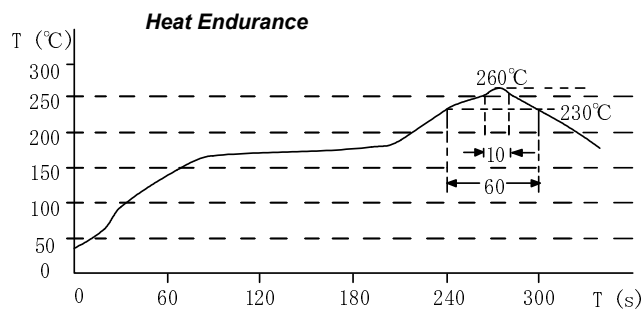

Please refer to the sales offices on our website - <http://www.sumida.com>

### Hong Kong

Tel. +852-2880-6688  
FAX. +852-2565-9600  
[sales@hk.sumida.com](mailto:sales@hk.sumida.com)

### Tokyo

Tel. +81-3-5202-7112  
FAX. +81-3-5202-7105  
[sales@jp.sumida.com](mailto:sales@jp.sumida.com)

### Chicago

Tel. +1-847-545-6700  
FAX. +1-847-545-6720  
[sales@us.sumida.com](mailto:sales@us.sumida.com)

### Shanghai

Tel. +86-021-5836-3299  
FAX. +86-021-5836-3266  
[shanghai.sales@cn.sumida.com](mailto:shanghai.sales@cn.sumida.com)

### Seoul

Tel. +82-2-6237-0777  
FAX. +82-2-6237-0778  
[sales@kr.sumida.com](mailto:sales@kr.sumida.com)

### Obernzell

Tel. +49-8591-937-0  
FAX. +49-8591-937-103  
[contact@sumida-eu.com](mailto:contact@sumida-eu.com)

### Shenzhen

Tel. +86-755-8291-0228  
FAX. +86-755-8291-0338  
[shenzhen.sales@cn.sumida.com](mailto:shenzhen.sales@cn.sumida.com)

### Singapore

Tel. +65-6296-3388  
FAX. +65-6296-3390  
[sales@sg.sumida.com](mailto:sales@sg.sumida.com)

### Neumarkt

Tel. +49-9181-4509-110  
FAX. +49-9181-4509-310  
[info@comp@eu.sumida.com](mailto:info@comp@eu.sumida.com)

### Taipei

Tel. +886-2-8751-2737  
FAX. +886-2-8751-2738  
[sales@tw.sumida.com](mailto:sales@tw.sumida.com)

### San Jose

Tel. +1-408-321-9660  
FAX. +1-408-321-9308  
[sales@us.sumida.com](mailto:sales@us.sumida.com)