



HK FuYuanXin Technology Development Co., Ltd

LED Waterproof Power Supply Specification

1. Product Name and No:

Name:	LED Power Supply
Item No:	CV-12045C

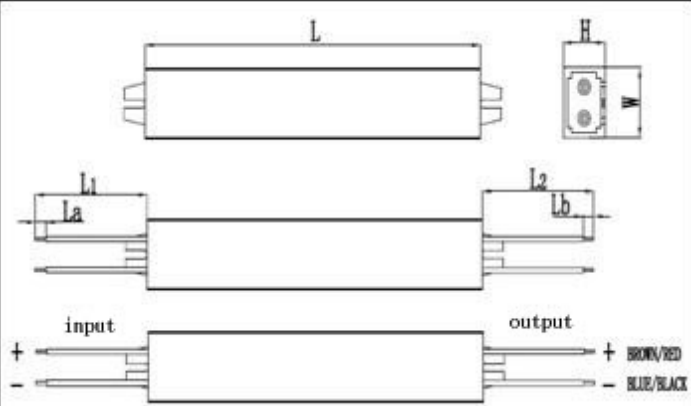
2. Technical Parameters:

Working Voltage (V)	AC90-130V/175-260V	Frequency (Hz)	47-63Hz
Input Current (A)	0.28A		
Output Voltage (V)	DC 12±0.5V	Maximum Output Power (W)	45W
Maximum Output Current (A)	3.75A		
Voltage Resistance (KV)	AC 2KV/3mA 3S	Short-circuit Protection	Yes
Temperature Rise (°C)	≤28°C	Temperature Protection	Yes
Waterproof Rate	IP67	Overload Protection	Yes
Certificate	CE (EMC+LVD)	Working Temperature (°C)	-25°C ~ 60°C
N.W (g)	340g		

3. Measurement (mm)

L±2	W±1	H±1	L1±5 Input	L2±5 Output	La±5	Lb±5	Lc±2	Ld±2
250	30	20	200	200	35	35	5	5

4. Others

QTY/CTN	24pcs/CTN	
Carton Size	34*24*18cm	
G.W/CTN	11Kg	
Lead Wire	Input: VDE three-core 0.75 Square Circular Axes 20cm; Output: VDE two-core 0.75 Square Circular Axes 20cm	

Notice:

- 1.Should be installed the radiating place,Can't install it near heat sources.
- 2.Avoid long-term work in the abnormal state, such as: overload, short circuit, non-operating voltage range of work;
- 3.The lamp voltage should be adapted to the supply's,and the lamp operating current can't exceed the maximum output current.
- 4.The junction must be solid and reliable. Pls add the insulation tape to avoid leakage.

Add: 515# 2 building Huayun Mansion Zhenxing Road Futian District Shenzhen China 518000

www.fyx-asia.com

Tel:0086-755-83641905 ; Fax:0086-755-83688664 ; Mob:0086-13512759656